


Direct Fabrics- Electric Roller Blind

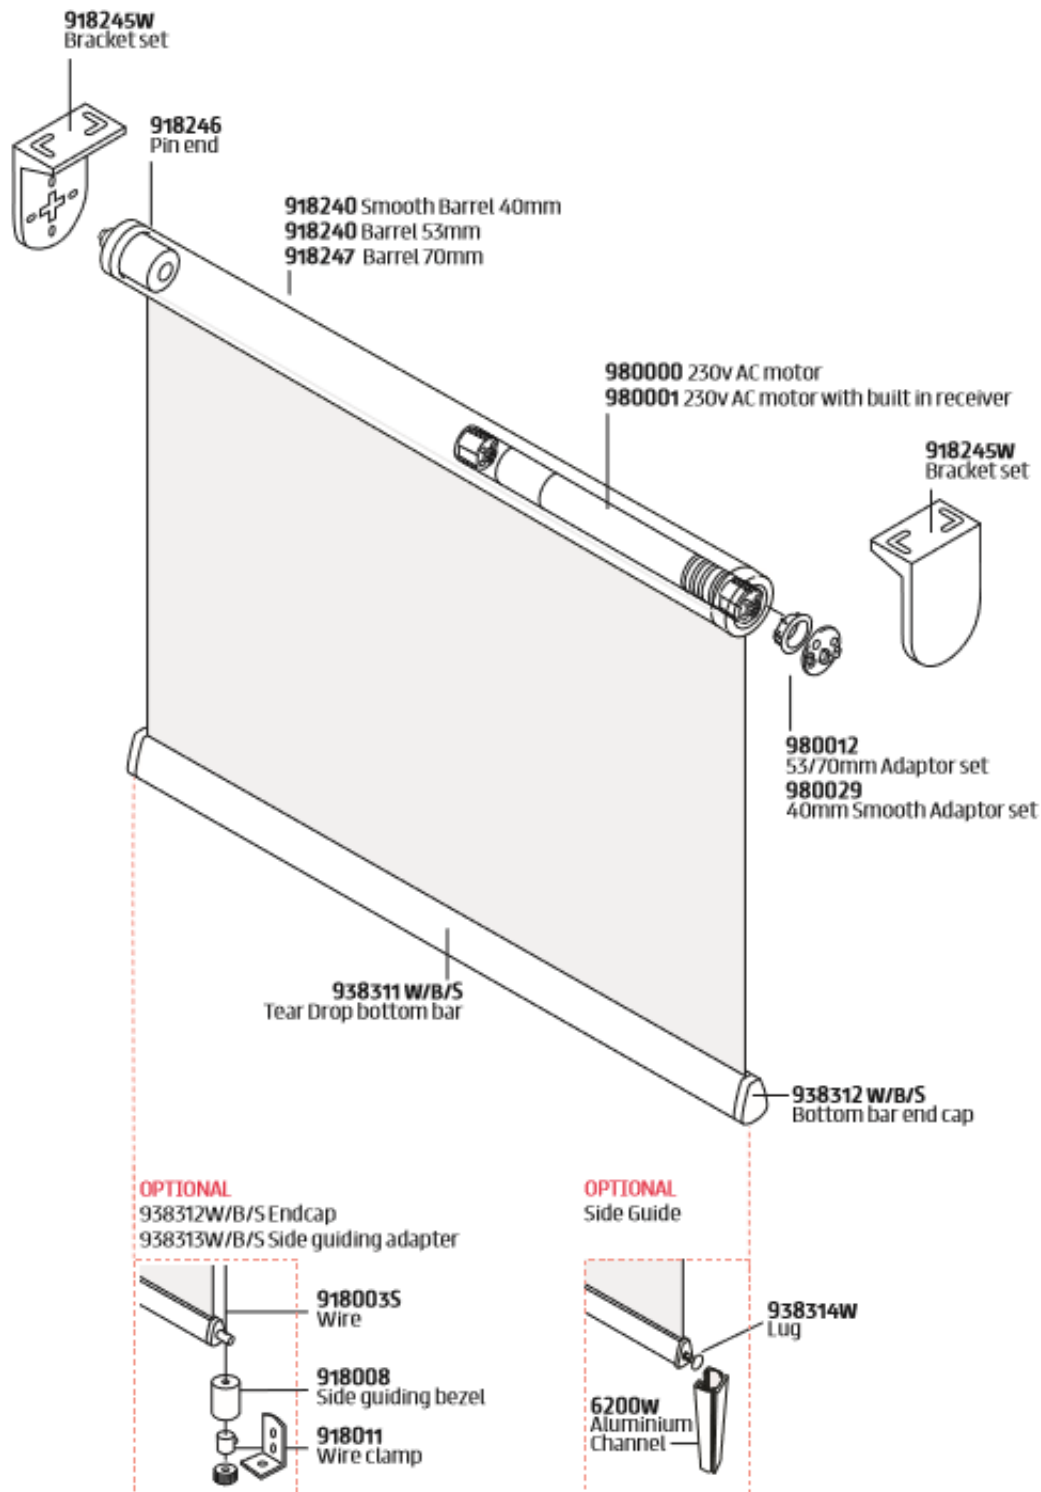

R55 Electric 240v Control:

1. The universal metal/plastic brackets supplied with the blind may be top or face-fixed.
2. Check that blind fits correctly. The fabric should roll off the back of the barrel, unless ordered as reverse-roll.
3. Fix the motor-end bracket using the appropriate screws/plugs.
4. Locate the motor onto its bracket, and mark the position of the pin-end bracket.

NB. To operate correctly, complete blind MUST be level.

5. Insert the pin-end of blind into its bracket, then locate motor end into the other bracket so that it drops into place.
6. For setting limit stops, refer to motor instructions.

R55 with Fascia:

1. If top fix, fix through the fascia profile using the indent to position the screws. If face fix, use the brackets supplied. Fix the brackets securely to the wall. Once secured, fix the fascia to the brackets using the threaded screw provided.
2. Lifting the blind in position, secure it into the transition plates.