

Fitting Instructions

for Vertical blinds
(VL30, VL31)



Fitting Instructions


for Vertical blinds
(VL30, VL31)


Fitting Instructions

Vertical blinds (VL30, VL31)

Safety Instructions:

1. Loops in pull cords, chains, tapes and inner cords that operate the product can cause strangulation
2. To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck
3. Move beds, cots and furniture away from window covering cords
4. Do not tie cords together. Make sure cords do not twist and create a loop

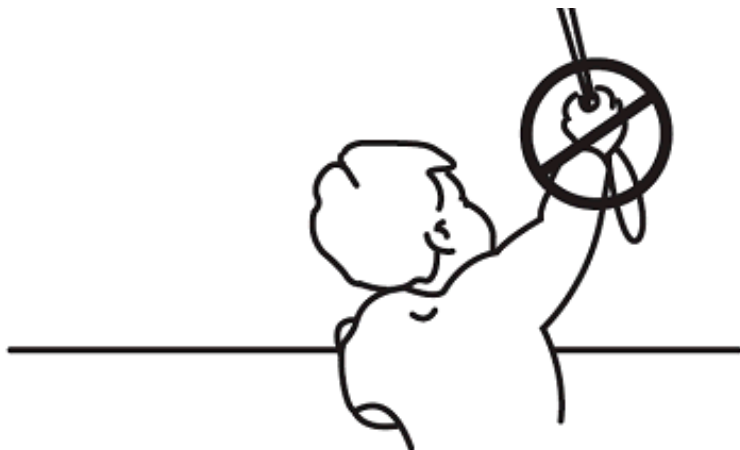


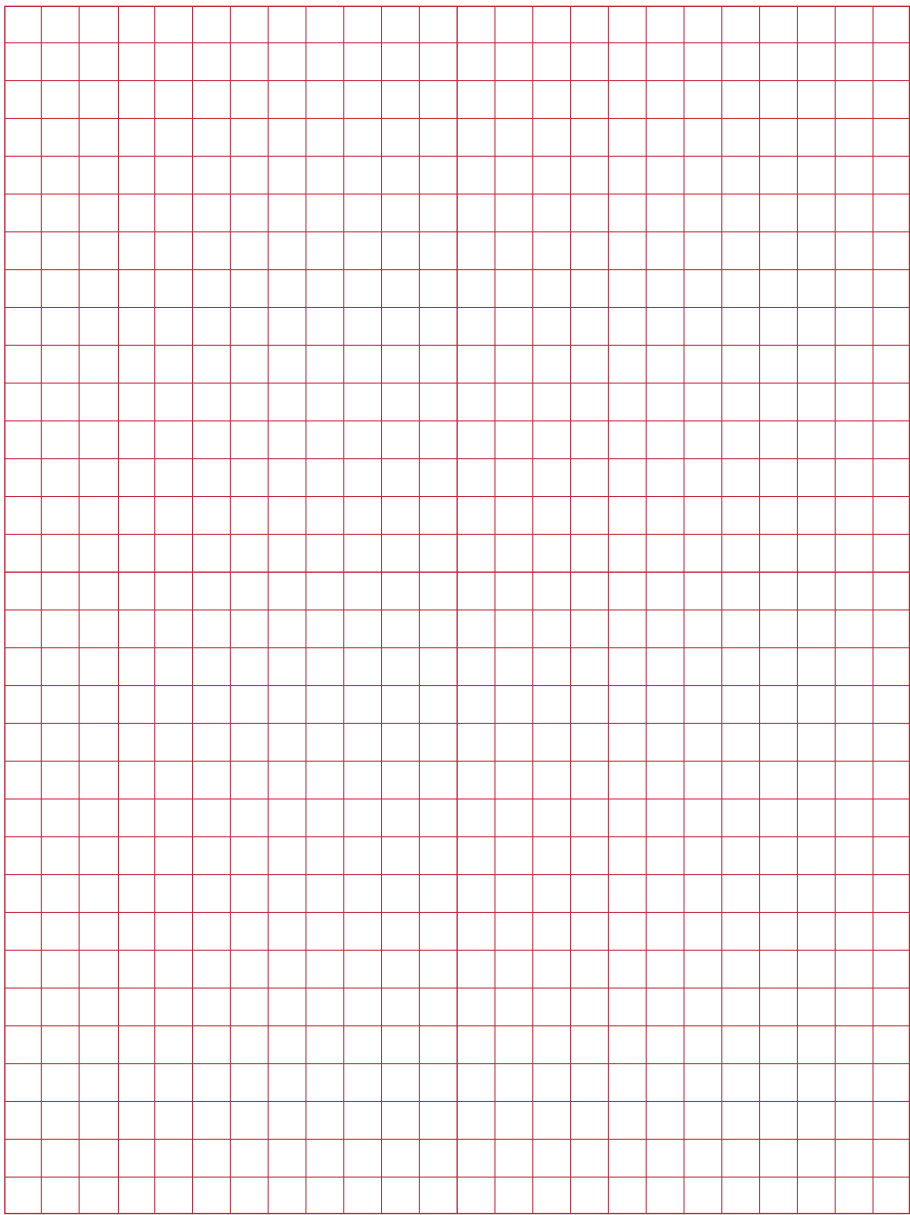

Fitting Instructions

Vertical blinds (VL30, VL31)

VL30 Cord control/VL31 Wand control:

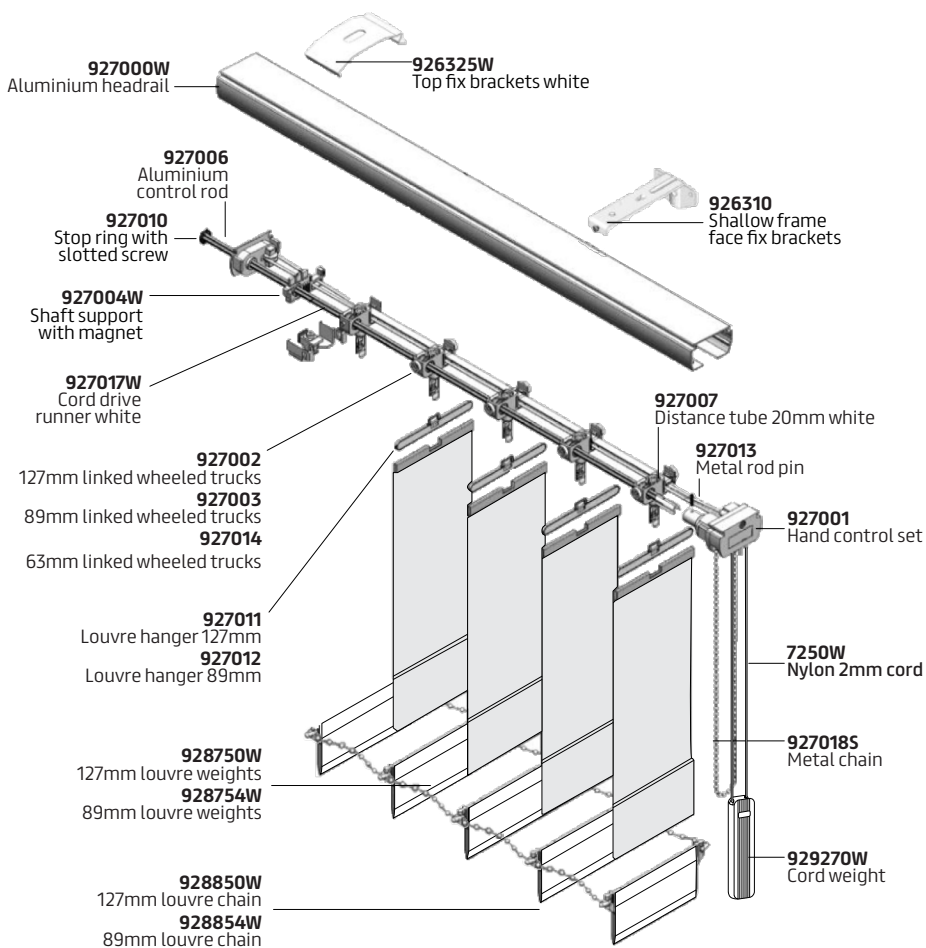



VL30 Cord control/VL31 Wand control:

Top-Fix Brackets

1. Fix the brackets to the ceiling or the lintel. Drill the holes on a line at least 75mm from the wall or window frame if the blind has 127mm louvres or 55mm for blinds with 89mm louvres. End brackets should be about 40mm from the ends of the track. Any remaining brackets should be spaced evenly between these two brackets.

Face-Fix Brackets

1. Fix the brackets to the wall or window frame as close as possible to the ceiling or the lintel with the same spacing as recommended for the top fixing brackets.

Fitting Instructions


Vertical blinds (VL30, VL31)

Fitting the Track


1. The track must be fitted into the brackets, keeping the controls to side chosen during the ordering process. Insert the small lip projecting from the brackets into the groove in the track. Push the track up into the brackets. The spring clip brackets will hold the track without further adjustment. If brackets have retaining screws, these should now be screwed into the other slot in the track.
2. Please do not over tighten the screws as it will damage the track.

Fitting the Louvres

1. Turn the hooks so that the slots are 90° to the track (see figure below). Hang the louvres, keeping all of the seams facing the same way. Your blind is now ready to operate.

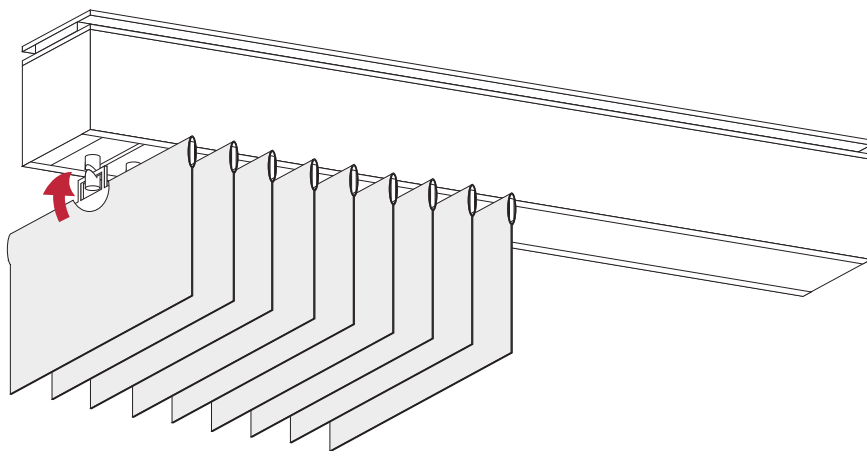

- NB.** Do not traverse blinds with louvres in closed position. Always turn them 90° to the track before operating cord control.
2. Ensure the relevant child safety device is used to comply with BS EN13120:2009+A1:2014, BS EN16433:2014 and BS EN16434:2014.

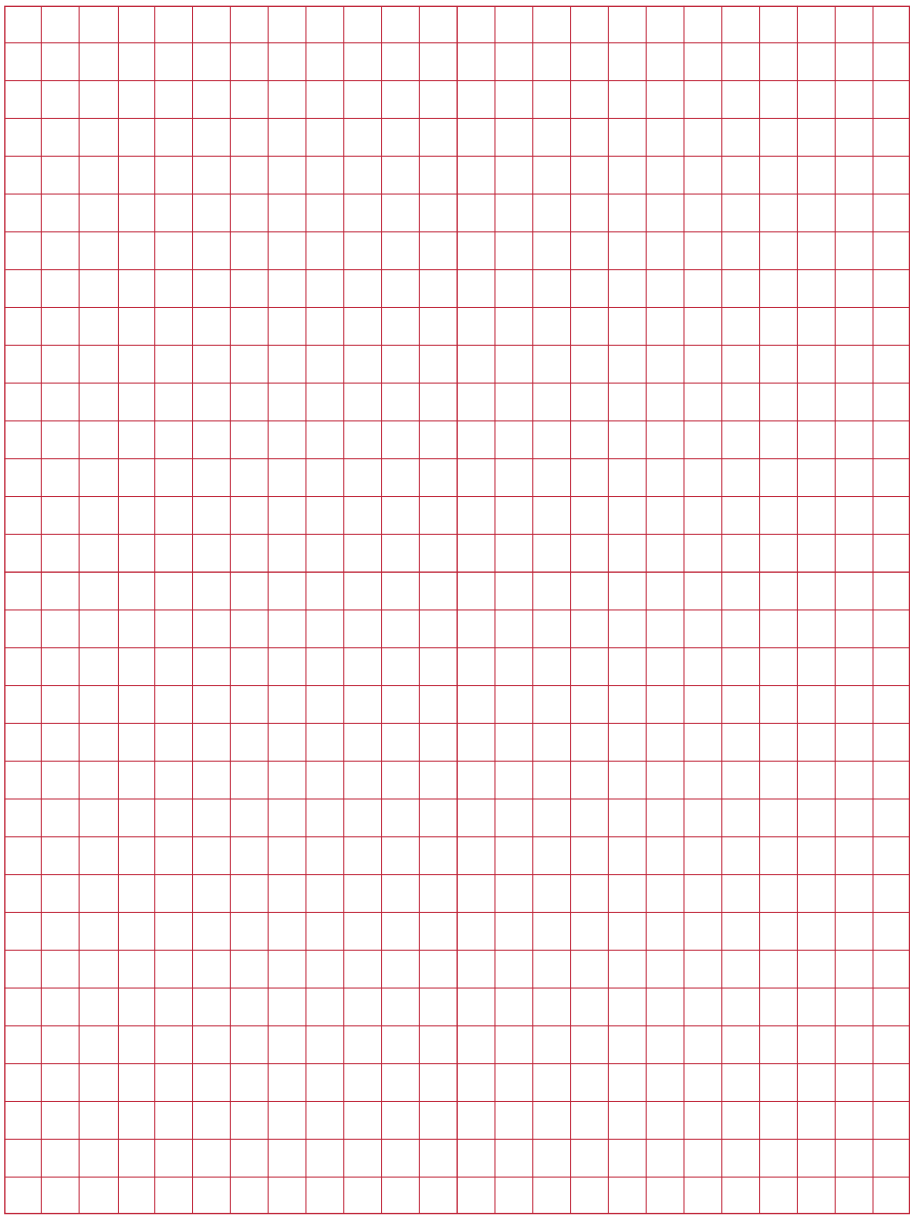



ECS Enterprises LTD, Direct Fabrics,
27 Station Road, Backwell, Bristol, BS483NW

Call 0330 111 8995

Email sales@direct-fabrics.co.uk

Visit direct-fabrics.co.uk

For more information on
all products, please call
the sales department.

